


# Pressed Type B heads

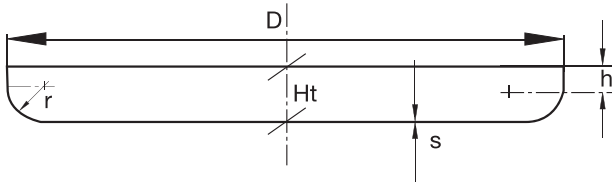

|  | D   | s       | r  | h                                                                  |
|--|-----|---------|----|--------------------------------------------------------------------|
|  | 320 | 1,5 ÷ 4 | 30 | height of the straight flange according to request of the customer |
|  | 350 | 1,5 ÷ 3 | 30 |                                                                    |
|  | 400 | 1,5 ÷ 3 | 20 |                                                                    |
|  |     | 4       | 30 |                                                                    |
|  | 450 | 1,5 ÷ 4 | 20 |                                                                    |
|  | 500 | 1,5 ÷ 4 | 20 |                                                                    |
|  | 550 | 1,5 ÷ 4 | 20 |                                                                    |
|  | 600 | 1,5 ÷ 4 | 20 |                                                                    |
|  | 650 | 1,5 ÷ 3 | 10 |                                                                    |
|  |     |         | 30 |                                                                    |
|  |     |         | 50 |                                                                    |

|  | D    | s       | r  | h                                                                  |
|--|------|---------|----|--------------------------------------------------------------------|
|  | 700  | 1,5 ÷ 4 | 20 | height of the straight flange according to request of the customer |
|  |      |         | 50 |                                                                    |
|  | 750  | 1,5 ÷ 3 | 50 |                                                                    |
|  | 800  | 1,5 ÷ 4 | 30 |                                                                    |
|  |      |         | 50 |                                                                    |
|  | 850  | 2,5 ÷ 5 | 50 |                                                                    |
|  | 900  | 1,5 ÷ 3 | 10 |                                                                    |
|  |      |         | 30 |                                                                    |
|  | 950  | 1,5 ÷ 3 | 30 |                                                                    |
|  | 1000 | 1,5 ÷ 3 | 30 |                                                                    |

The indications for the height of the straight flange (h) and the total height (Ht) can be customised and have to be communicated by raising a request.